



# V1.0 & V3.0 Portaband Table Instructions


## (1) Install Bolt on Legs:

If you purchased the V3.0 Portaband table, attach the legs using the supplied 5/16" button head bolts and nyloc nuts.

## (2) Remove Factory Foot Blade Guard:

Remove the factory foot guard on your Milwaukee, Makita, Harbor Freight or Dewalt band saw, the steel foot guard is held on by two or three screws depending upon which model of saw you own.

Attach the SWAG Portaband table to the factory foot guard mounting location using the supplied screws as shown in the picture below. Our tables are designed to fit a variety of saws and there will be left over screws that you do not need to mount your particular saw.

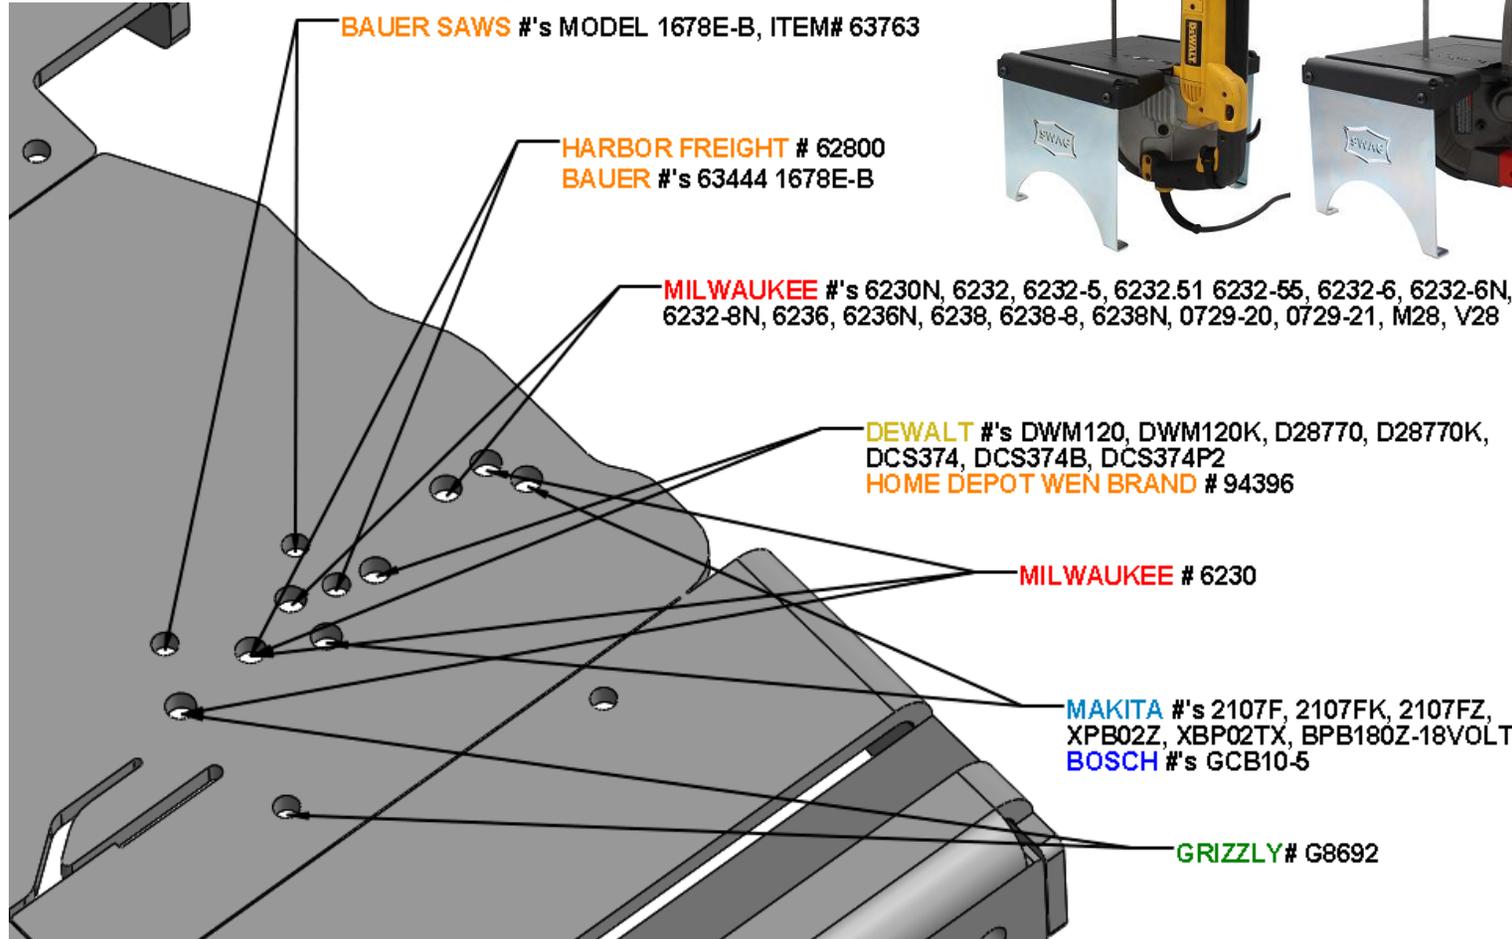

## (3) Thumb Knob:

Install the saw in the table and thread in the provided 5/16" red thumb screw from the bottom of the table. If the threads on the thumb knob stick up through the top of the table, use the provided washer to reduce the effective length of the fastener.




## 4) Trigger Control:

We recommend using an 8" Velcro strap or a 2.5" spring clamp to hold down the trigger on your saw. These options can easily be removed when the saw is not mounted in the SWAG Portaband table.



MILWAUKEE NON DEEP THROAT MODEL #'S 6223, 6225, 6226, 6227

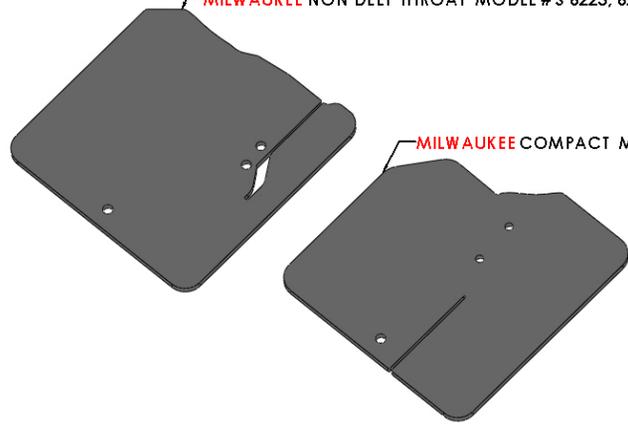

MILWAUKEE COMPACT MODEL #'S 6242-6, 2629-22 M18, 2626-20 M18

**(5) Home Depot WEN #94396:**

If you are installing the WEN model # 94396 saw, you will need to remove the factory blade guard sliding nut and cut it into two individual pieces as shown below. Then reinstall the two nut halves back into the table.



**(6) Grizzly Saw Model #G8692:**

If you are installing the Grizzly model #G8692 saw on the V3.0 table, you will need to cut 1" off the front edge of the factory blade guard as shown. If you are installing the Grizzly on the V1.0 table, no modifications are necessary. Install the saw as shown. Keep the top Phillip's head screw in the factory position (holding down the blade guard,)



then install the portaband table using the same two Phillip's head screws that came with your saw.

# SWAG Portaband Table V1.0 Harbor Freight Saw PN# 47840 Installation Instructions "ONLY"

**(1) Remove Factory Foot Guard:**

Remove the factory blade guard on your Harbor Freight band saw, then loosely install the provided foot guard as shown in the photo.



**(2) Mounting Table**

Attach the SWAG Portaband V1.0 table using the supplied 10-24 Phillip's head screws as shown in the picture below.

With the foot guard loose, you can adjust the side to side tilt of the table. Once the saw blade is perpendicular to the table, tighten the two blade-guard mounting screws.

